

## Introduction

- Anomalous, power-law based phenomena are ubiquitous
- Anomalous biomechanics, Figs. 1 & 2
- Eddies in turbulent flows, Fig. 3
- Anomalous diffusion in transient media



Figure 1. Viscoelastic behavior of human tissue.

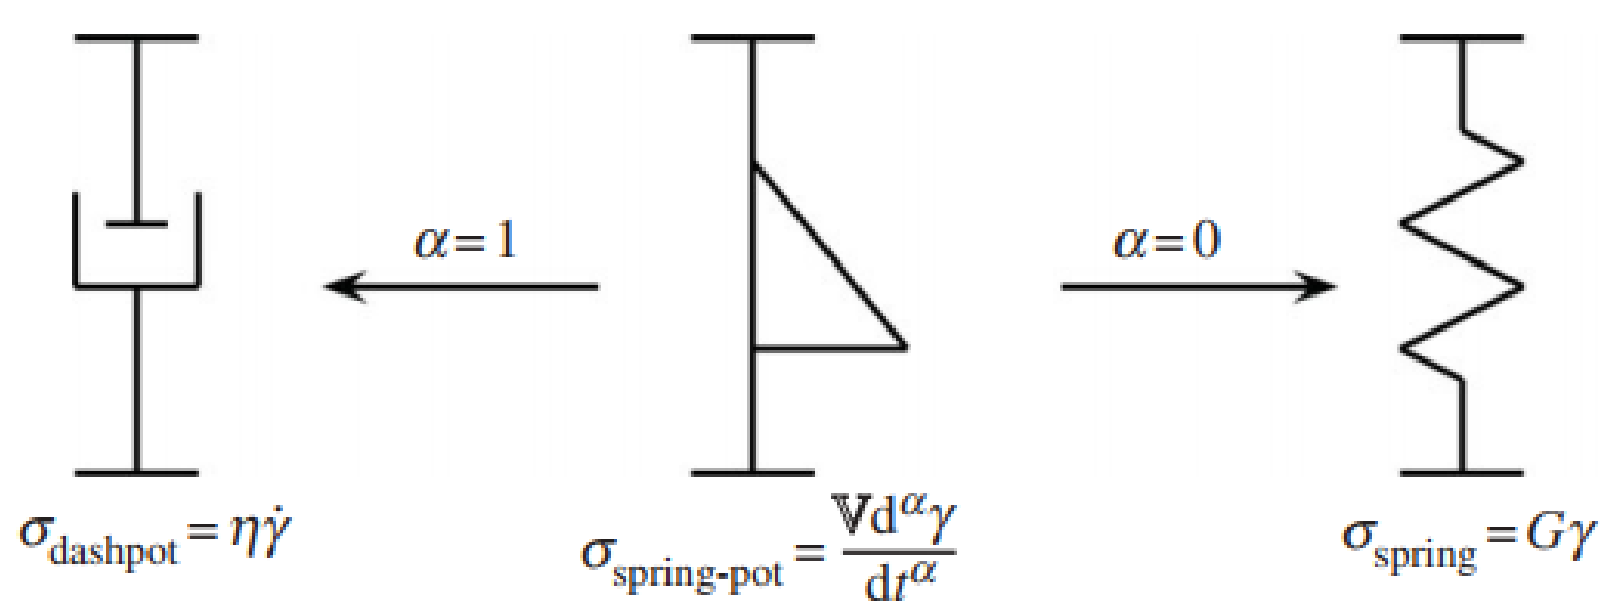


Figure 2. Physical interpretation of fractional derivatives as interpolation operators in anomalous materials [1].

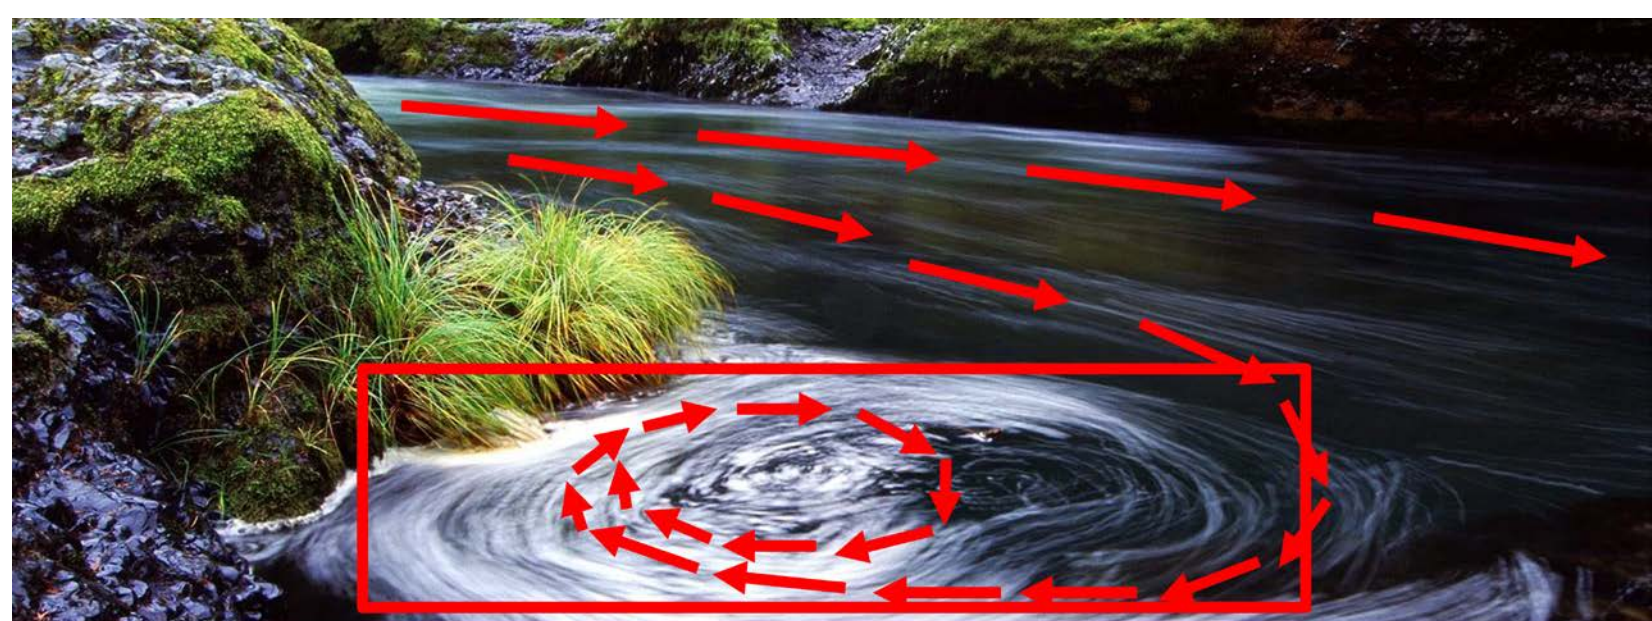


Figure 3. Non-Brownian particle motion due to particle trapping in turbulent eddies.

- Fractional derivatives capture the power-law history of anomalous phenomena, shown in Eqn. 1

$${}^{\text{RL}}_0\mathcal{D}_t^\nu u(t) = \frac{1}{\Gamma(1-\nu)} \frac{d}{dt} \int_0^t (t-s)^{-\nu} u(s) ds \quad (1)$$

Kernel captures power law

Integration captures history

- Low CPU time and high accuracy are desired
- Benchmark criterion required to quantify computational efficacy
- Thus, we develop an assessment framework to evaluate numerical schemes
- R platform works well with large sets of data

## Methods

- Three methods were benchmarked with Eqn. 2, a standard FODE
  - Petrov-Galerkin Spectral Method (PGSM) [2]
  - Finite Difference Method (FDM) [2]
  - Finite Element Method (FEM) [3]

$${}^{\text{RL}}_0\mathcal{D}_t^\nu u(t) = f(t), u(0) = 0 \quad (2)$$

- Tested with method of fabricated solution for CPU time and error,

$$\hat{E}_{L_2} = \frac{\|u^{\text{ex}}(t) - u^{\text{app}}(t)\|}{\|u^{\text{ex}}(t)\|}$$

- Schemes are applied to anomalous Maxwell material stress-strain behavior via Eqn. 3 [1]

$$\mathbb{V} {}^{\text{RL}}_0\mathcal{D}_t^\nu \epsilon(t) = \sigma(t) + \frac{\mathbb{V}}{\mathbb{G}} {}^{\text{RL}}_0\mathcal{D}_t^{\nu-\mu} \sigma(t) \quad (3)$$

where  $\epsilon(t)$  and  $\sigma(t)$  are the strain and stress of the material

## Results

- Fig. 4 shows a sample fit of the test benchmark function  ${}^{\text{RL}}_0\mathcal{D}_t^{0.2} t^{5.1} = \frac{\Gamma(6.1)}{\Gamma(5.9)} t^{4.9}$  using PGSM

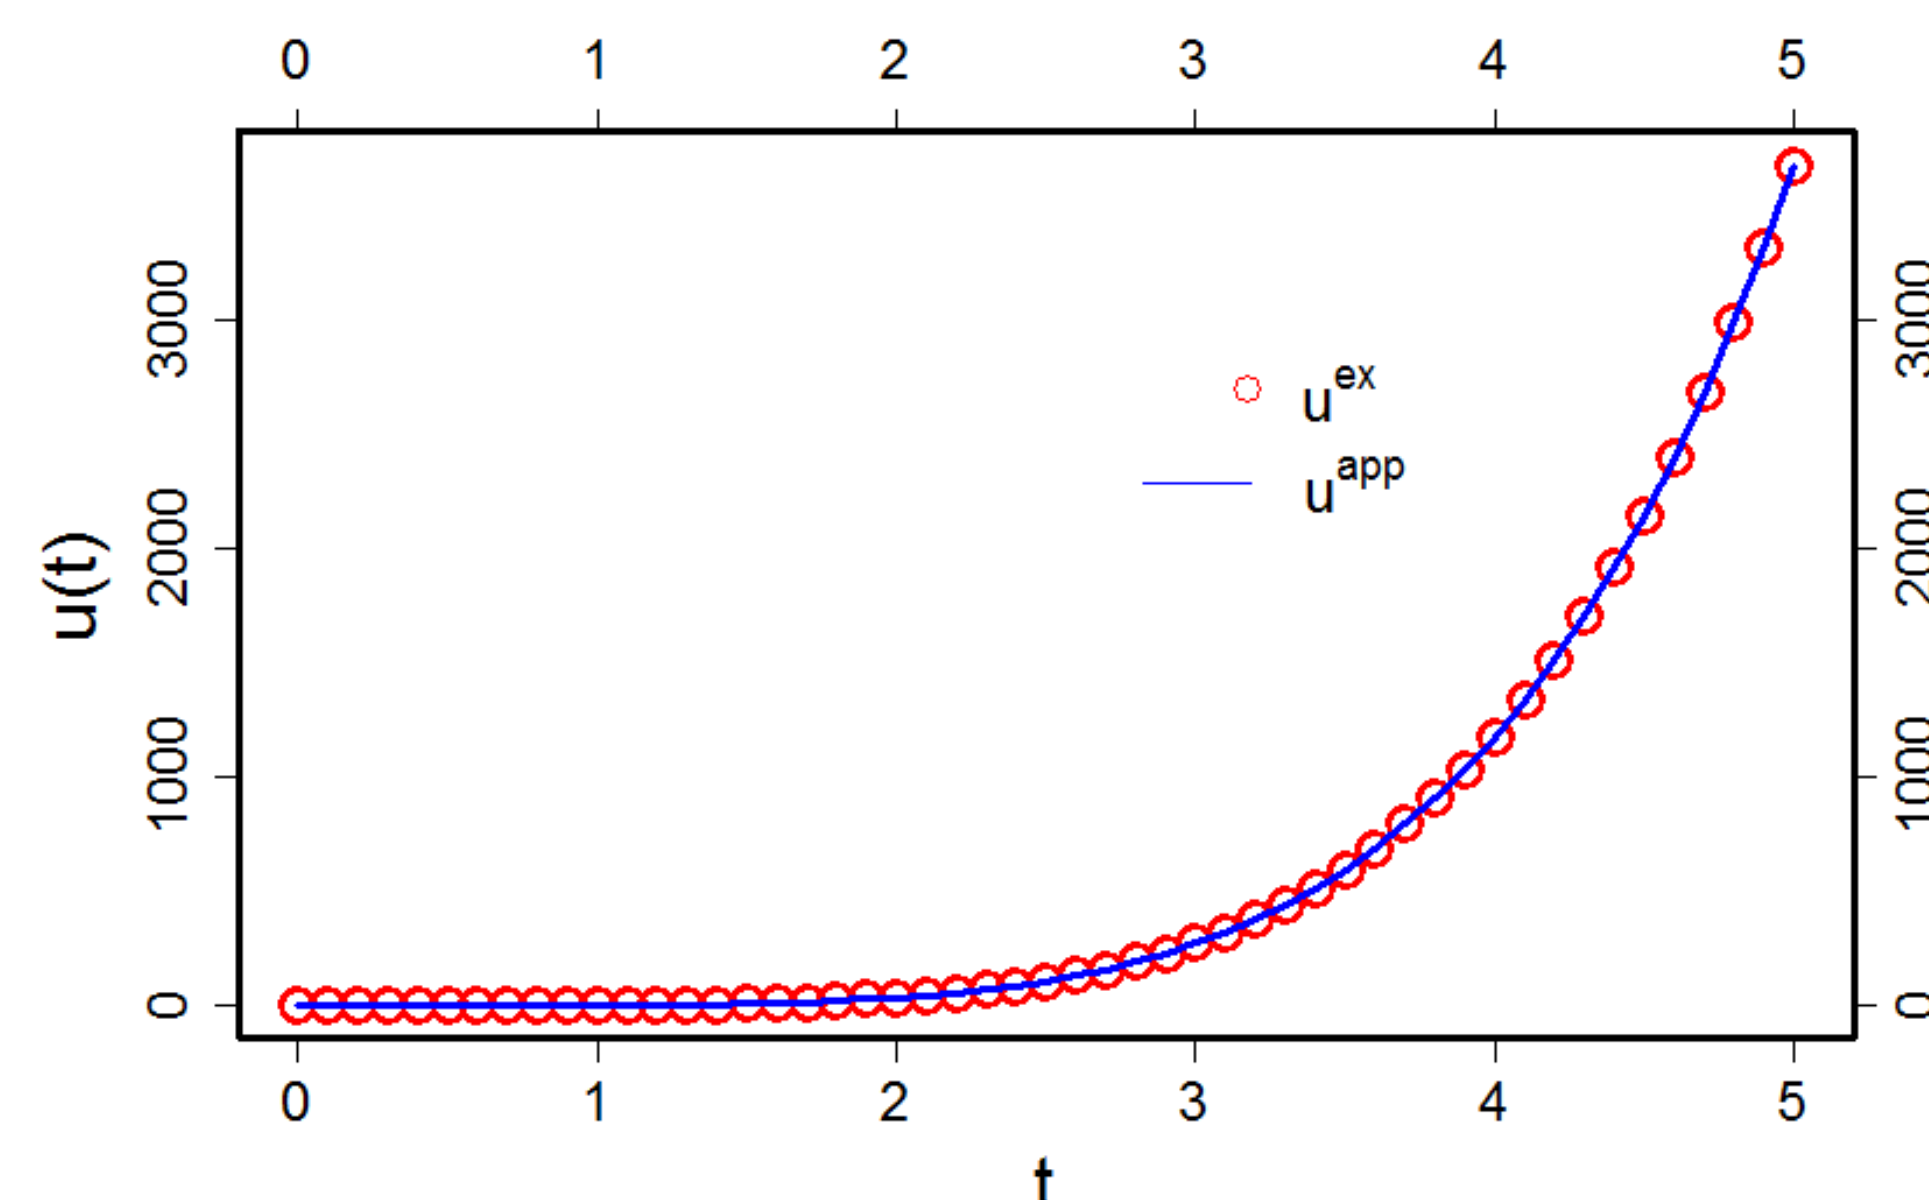


Figure 4. Simulation of benchmark equation  ${}^{\text{RL}}_0\mathcal{D}_t^{0.2} t^{5.1} = \frac{\Gamma(6.1)}{\Gamma(5.9)} t^{4.9}$  using PGSM with 6 modes.

- Fig. 5 shows the convergence rates for PGSM, FDM, and FEM

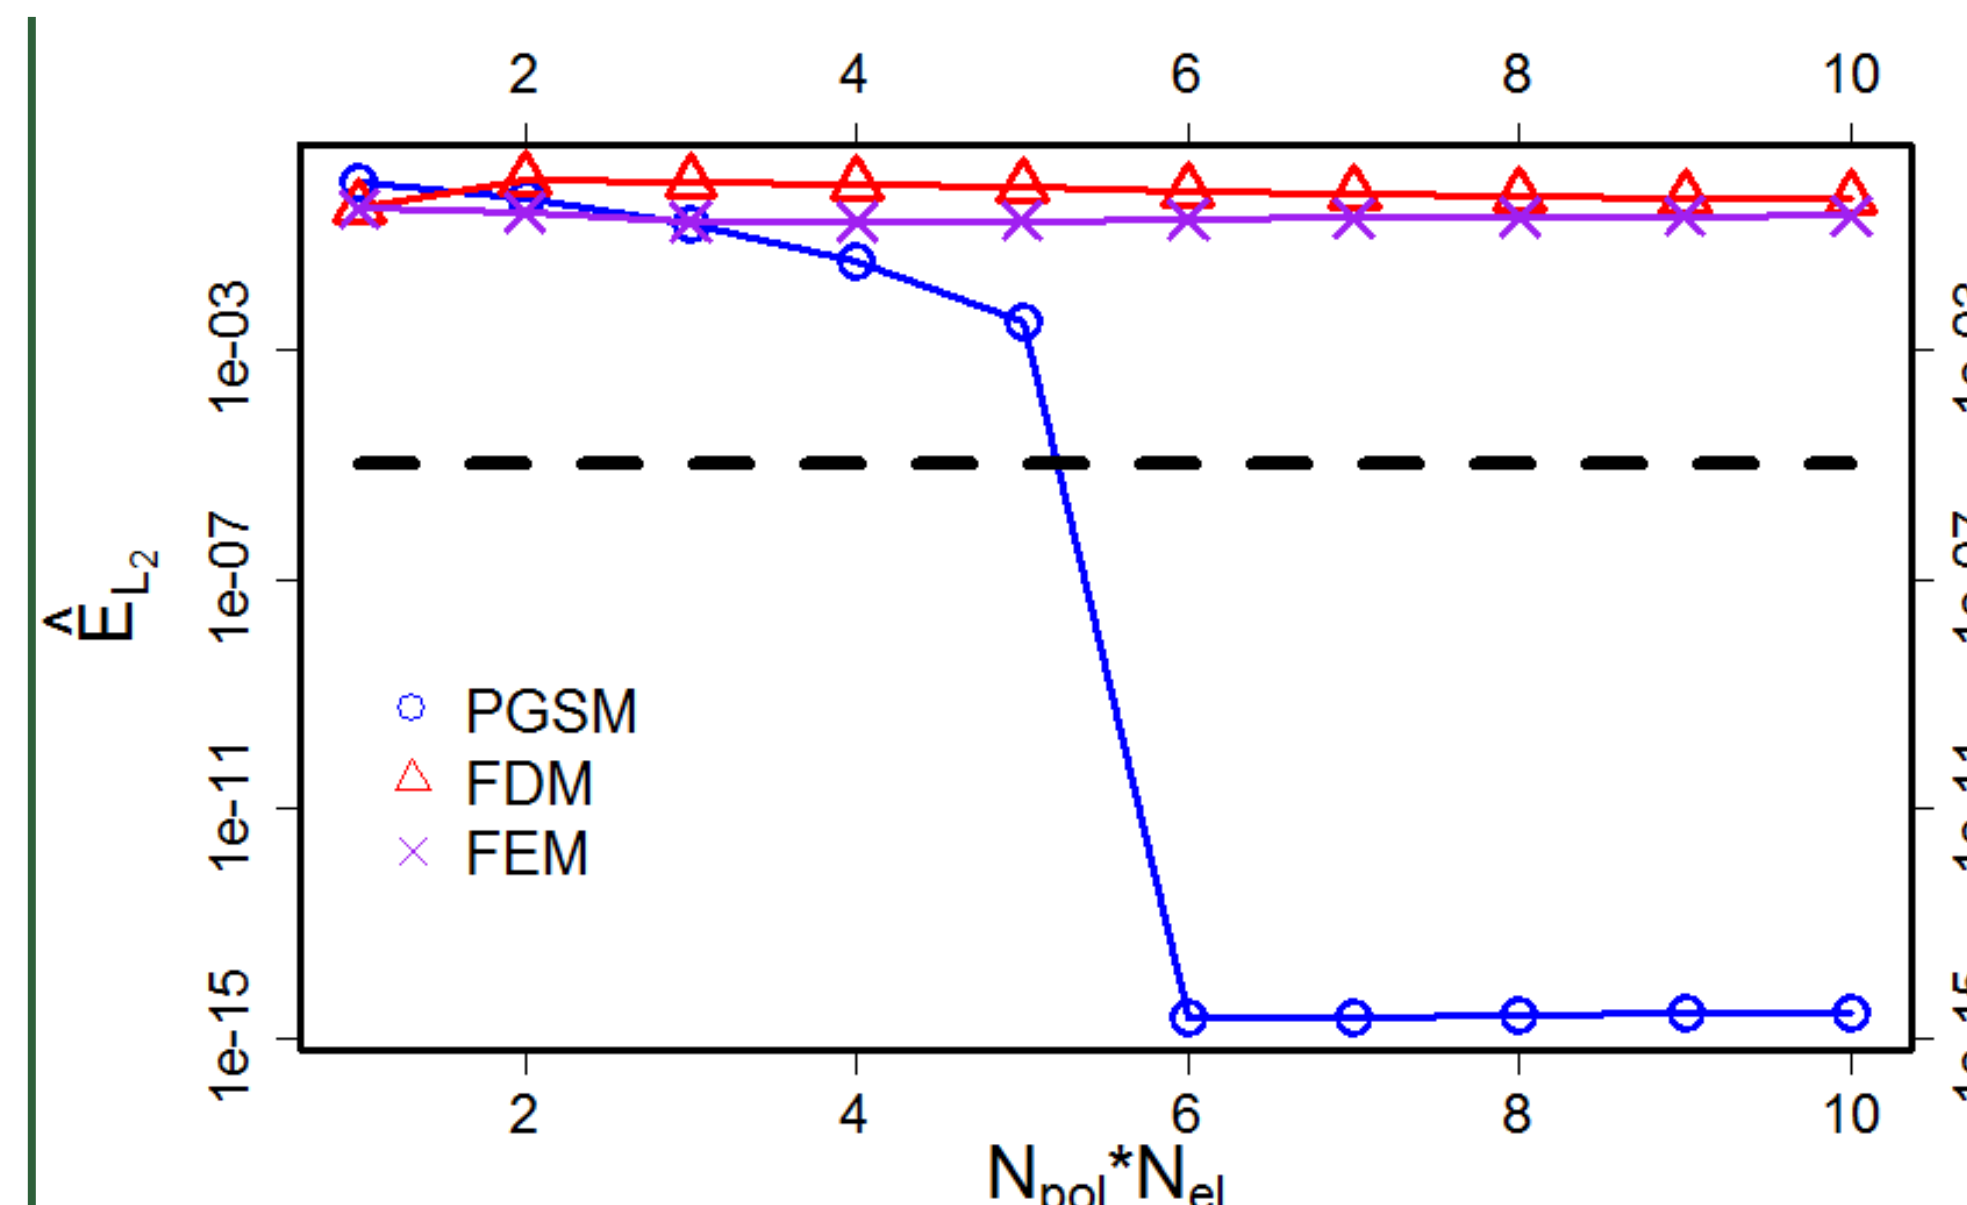


Figure 5. Rate of convergence for  ${}^{\text{RL}}_0\mathcal{D}_t^{0.2} t^{5.1} = \frac{\Gamma(6.1)}{\Gamma(5.9)} t^{4.9}$ . PGSM demonstrates absolute convergence at 6 terms.

- Table 1 lists CPU times required to reach  $\mathcal{O}(10^{-5})$  error for each method
- Table 1. Errors for various methods at  $N_{\text{pol}} * N_{\text{el}} = 6$

### Method $\hat{E}_{L_2}$ at $N_{\text{pol}} * N_{\text{el}} = 6$

Method	$\hat{E}_{L_2}$ at $N_{\text{pol}} * N_{\text{el}} = 6$
PGSM	2e-15
FDM	6e-1
FEM	2e-1

- Fig. 6. shows the simulations of fractional Maxwell material, Eqn. 2, using PGSM

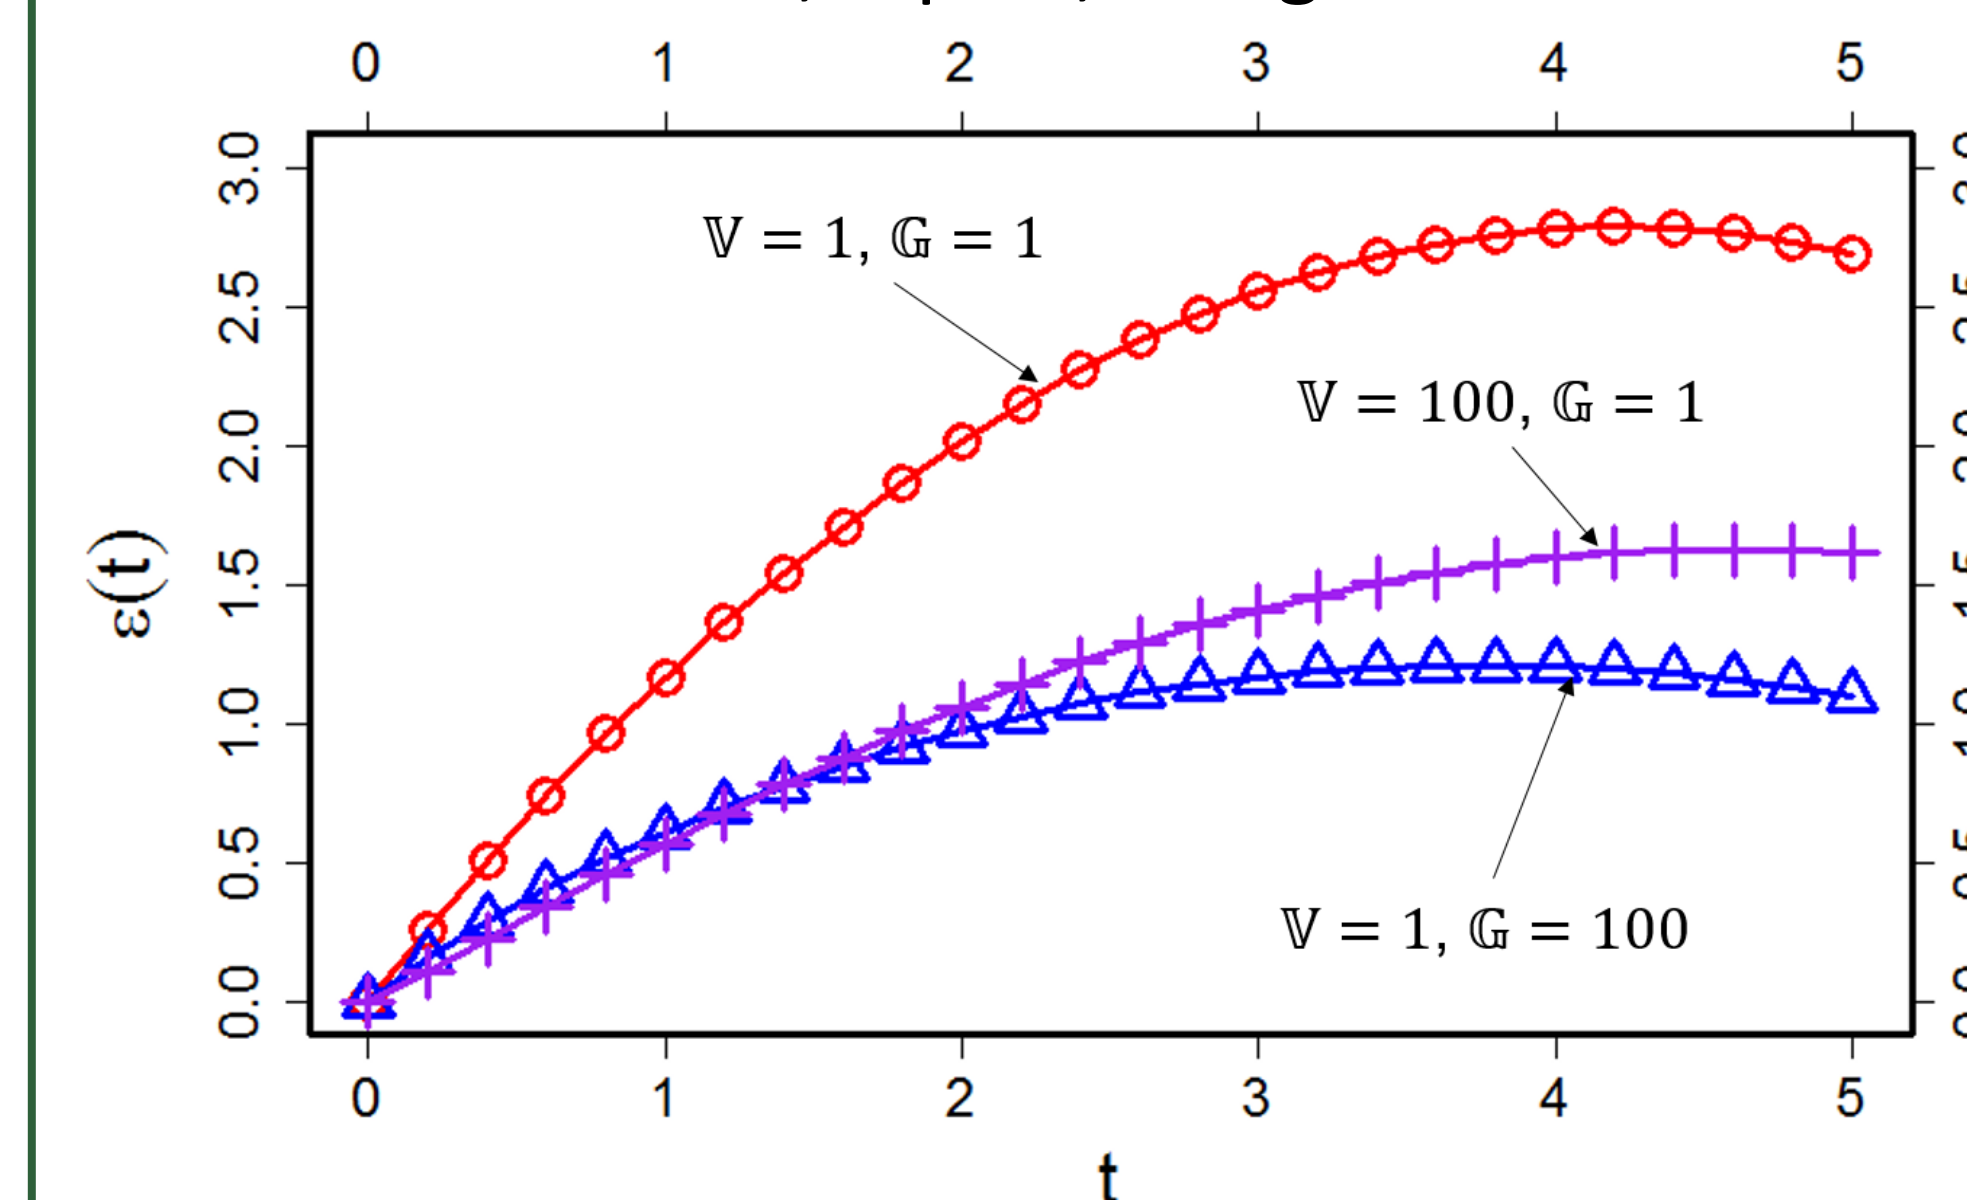


Figure 6. Simulations of strain,  $\epsilon(t)$ , versus test stress function,  $\sigma(t) = \sigma_0 \left[ \frac{t^{\nu-\mu}}{\Gamma} - \frac{t^{1+\nu-\mu}}{\Gamma} \right]$ , with  $\nu = 0.9$ ,  $\mu = 0.7$ , and  $\sigma_0 = 1$  and various  $\mathbb{V}$  and  $\mathbb{G}$

## Discussion

- Framework records evaluation criterion for schemes, listed in Fig. 5 and Table 1
- Table 2 lists insight into beneficial algorithm mechanics



Table 2. Key features for various methods

Method	Key Feature
PGSM	Diagonal linear system
FDM	Generalizable form
FEM	Adaptive to irregularities

- Table 3 lists scheme pros and cons
- Data from assessment framework supports intuitive pros and cons of algorithms

Table 3. Pros and cons for various methods

Pros	Cons
	<b>PGSM</b>
• Captures singular & smooth behavior	• Hard to implement
• High, fast accuracy	• Limited to smooth functions
	<b>FDM</b>
• Generalizable	• Large history iteration
• Easy to Implement	• High accuracy unfeasible
	<b>FEM</b>
• Adaptive to irregular domains or singularities	• Large history matrix

## Future Work

- Extension to fractional diffusion equation numerical schemes
- Implement data fitting performance metrics for large data sets

## References

- A. Jaishankar and G. H. McKinley, "Power-law rheology in the bulk and at the interface: quasi-properties and fractional constitutive equations," *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, vol. 469, no. 2149, pp. 20120284–20120284, Nov. 2012.
- M. Zayernouri and G. E. Karniadakis, "Exponentially accurate spectral and spectral element methods for fractional ODEs," *Journal of Computational Physics*, vol. 257, pp. 460–480, Jan. 2014.
- E. Kharazmi, M. Zayernouri, and G. E. Karniadakis, "A Petrov-Galerkin Spectral Element Method for Fractional Elliptic Problems," *arXiv:1610.08608 [math]*, Oct. 2016.

## Acknowledgements

Ehsan Kharazmi, Michigan State University, Department of Mechanical Engineering.

## Contacts

Mohsen Zayernouri, PhD, Michigan State University, Department of Mechanical Engineering, East Lansing, MI, 48824.  
Email: zayern@egr.msu.edu